

HVWL Weather Louvre

To protect fans, inlets and outlets from inclement weather and reduce external light ingress.

The Louvre offers full control of incoming air flow, wind and various degrees of rain proofing (depending on blade spacing), whilst also providing an aesthetic external view.


Bespoke milled aluminium finish, which can be powder coated to RAL colours, if required.



features and benefits

- Reduces light infiltration for more even light distribution overall
- Reduces rain ingress, preventing dampness
- Reduces wind effect, encouraging even temperatures and reduced noise levels
- Assists smooth airflow entering the building
- Provides optimum inlet area for airflow
- Includes bird guard

dimensional drawing

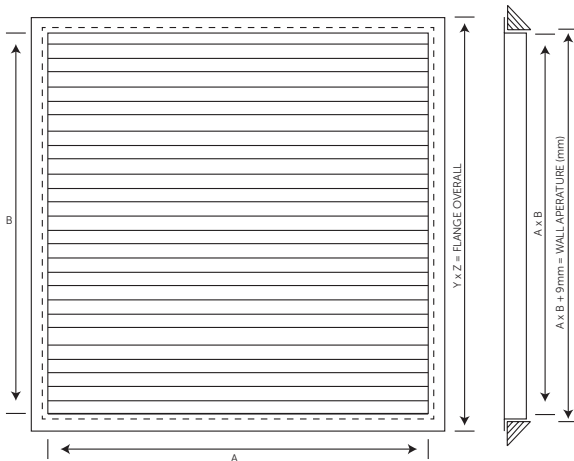

dimensions

| | A x B - Wall Aperture | Y x Z - Flange Overall | Weight (kg) |
|----------|-----------------------|------------------------|-------------|
| HVWL800 | 1000 x 1000 | 1087 x 1087 | 12.50 |
| HVWL1000 | 1250 x 1250 | 1337 x 1337 | 16.54 |
| HVWL1250 | 1400 x 1400 | 1487 x 1487 | 24.50 |
| HVWL2000 | 2000 x 2000 | 2087 x 2087 | 50.00 |

Dimensions in mm.